




Wireless Vehicle Booster (4G)

Model # RFAB-M4G50-5B

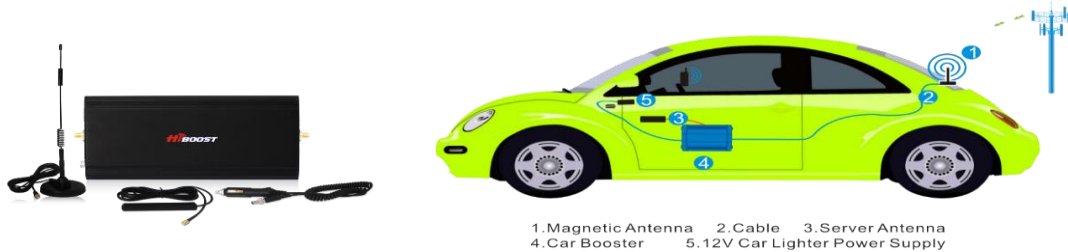

Overview: The RFAB-M4G50-5B is a 50dB ultra wide band cell phone signal booster that provides a complete solution for all vehicles. It can improve significantly 2G, 3G and 4G cell phone signal strength both voice and data especially in the poor signal area.

Key Features:

- Streamline design
- Quality metal construction, strong and durable
- Support all 2G, 3G and 4G bands
- Good heat dissipation for longevity
- Low interference to cell tower
- Multiple users are supported
- 3 year warranty
- FCC certified

Electrical Specification	
UL Frequency Range	698-716 / 776-787 / 824-849 / 1850-1910 / 1710-1755
DL Frequency Range	728-746 / 746-757 / 869-894 / 1930-1990 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO and all cellular standards
Max. Gain	50dB
Max. Output Power	23.2Bm(UL)/4.8dBm(DL)
Automatic Level Control	≥15dB, auto shut off after 15dB
Inter-modulation	≤ -19dBm
Spurious Emission	≤ -13dBm
ALC LED	Orange @ALC 1~5dB,Red @ALC 15~20dB,Flashing Red @LED off after 5 sec.
I/O Port	SMA-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	4.7*7.8*1.4inch / 120*198*34mm
Weight	≤ 5.5Lbs/2.5Kg
Power Supply	DC12V/3A