

**Comba**  
keeps you connected

# ComFlex™ DAS






keeps you connected

## ComFlex™ DAS Master Unit


- Integrated RF source access and optical conversion in one chassis
- Modular design for flexible field upgrade and easy maintenance
- Independent gain control of each RF source
- Supports 8 bands/sectors
- Supports 8 Remote Units (RUs)



### SISO Configured System

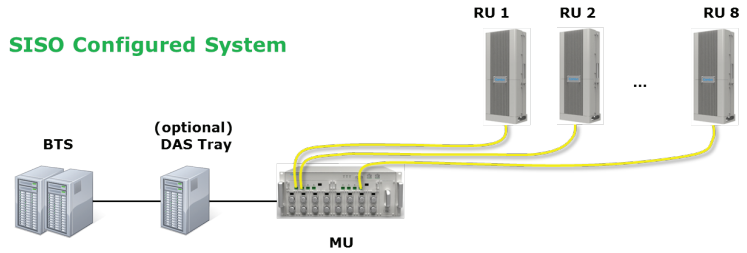

### MIMO Configured System

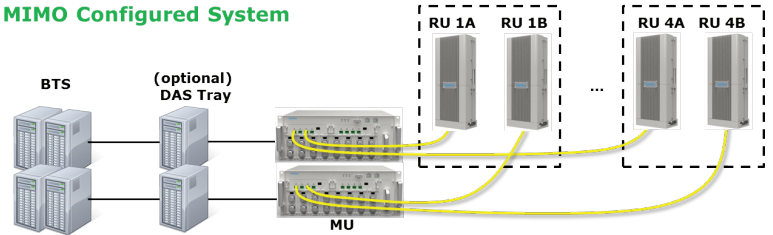


## ComFlex™ DAS RF Unit

- Available for most North American bands
- Simplex/Duplex supported
- Input power level by LED display
- Independent gain control



## ComFlex™ DAS Remote Unit

- Delivers 1 watt (LRU) / 5 watt (MRU) per band
- Supports all North American bands
- High linearity power amplifier
- Compact size and light weight:  
LRU: 23.6"x9.8"x5.1", 44lbs  
MRU: 26.0"x9.8"x6.3", 55lbs
- Low power consumption:  
LRU: 120W  
MRU: 200W
- Convection cooling with NO noise
- Modular power supply unit

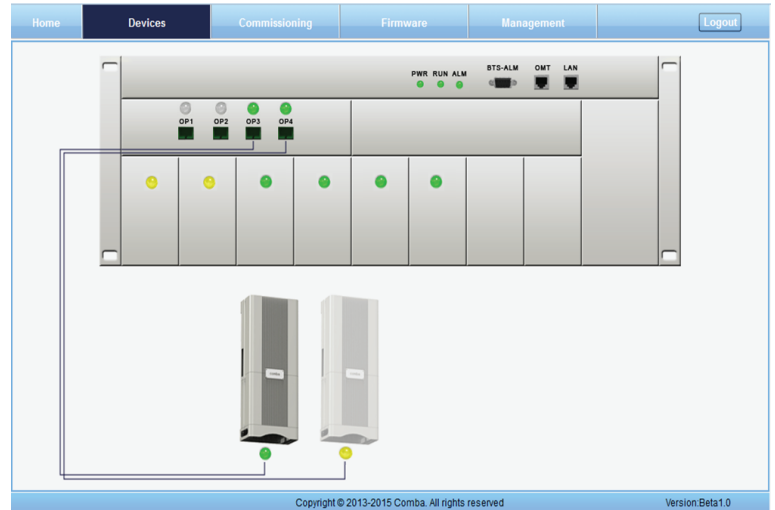

## ComFlex™ DAS Software

- Simple web based graphic user interface.
- User friendly
- Automatic live equipment detection
- Self-guided commissioning
- SNMP V2/V3 supported