

PAF	P2RFC-2402-XX			
RE\	DESCRIPTION	DWN	DATE	APPROVED
_	ENGINEERING RELEASE	CZS	03/28/19	JDMc

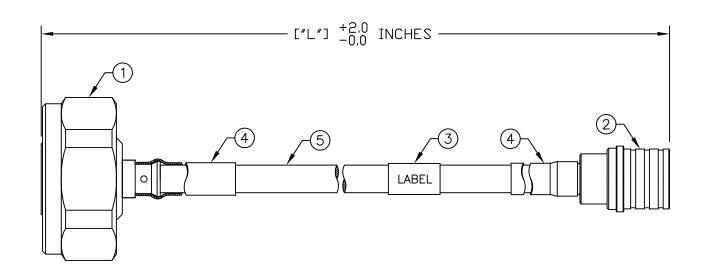

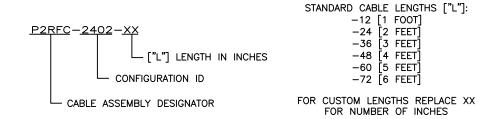

SPECIFICATIONS:

IMPEDANCE: 50 Ohms FREQUENCY RANGE: 0-6 GHz

3RD INTERMODULATION: ≤-155 dBc @ 700MHz & 1900MHz 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

5	TFT-402-LF	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]				
4	TUBING	2	COAXIAL (PLENUM) CABLE HEAT SHRINK	BLACK BLACK	DRAWN	
3	THT-64-427-3	1	CUSTOM LABEL	VINYL	C. ZUNIGA	03/28/19
2	RQA-5000-SR2LP	1	QMA PLUG CONNECTOR	CuSnZn	CHECKED	
1	RFD-43MS-SR2	1	4.3/10 MALE CONNECTOR	CuSnZn	ORJ DRAWN	
#	PART NUMBER	QTY	DESCRIPTION	FINISH	C. ZUNIGA	03/28/19

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

PROPRIETARY AND CONFIDENTIAL

DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340

4.3/10 MALE TO QMA MALE

141 SEMI FLEX CABLE ASSEMBLY

.141 SEMITEEA CABLE ASSEMBLT								
SIZE	E CABLE GROUP DWG NO.				REVISION			
А	_		P2RFC-2402-XX			_		
SCALE: NTS		ENGINEE	RING ID:	000000	SHEET	1	OF	1