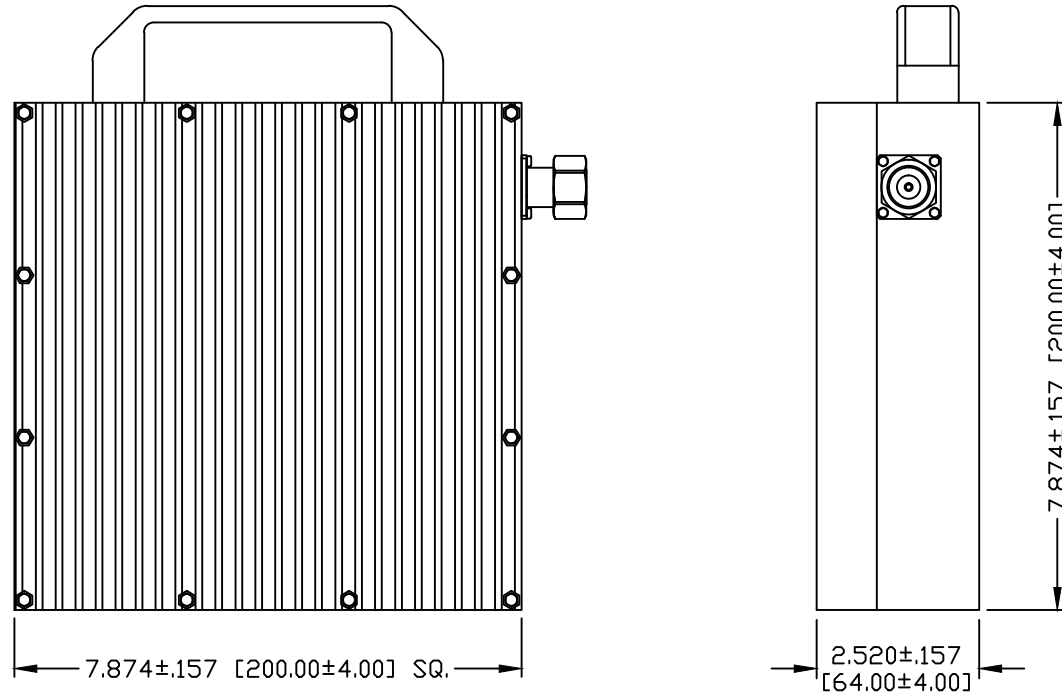


PART NO.

RFLOAD-43M100

REV	DESCRIPTION	DWN	DATE	APPROVED
B	UPDATED SPECS	CZS	09/09/19	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 350–2700MHz
 3RD ORDER IM: -160dBc (RELATIVE TO CARRIER)
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS
 VSWR: $\leq 1.3:1$ @ 350–600MHz
 VSWR: $\leq 1.2:1$ @ 600–2700MHz
 AVERAGE POWER: 100W @ 350–2700MHz
 APPLICATION: INDOOR/OUTDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: IP65
 TEMPERATURE RANGE: -30°C ~ +65°C
 COLOR: BLACK

NOTES:

CONNECTOR WILL HAVE PROTECTIVE CAP ON

CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		RoHS COMPLIANT		RFconnectors DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	
PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		100 WATT TERMINATION LOAD 4.3-10 MALE - 350-2700 MHz					
DRAWN C. ZUNIGA	09/09/19	SIZE A	CABLE GROUP N/A	DWG NO. RFLOAD-43M100	REVISION B		
CHECKED		SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1			
ORJ DRAWN C. ZUNIGA	09/18/18						