



Huntsman[®] Secure Network Radio LX4-SAB


*Secure, Portable, Wireless
Mesh Network Radio — reliable
in extreme environments and
weather conditions*

Huntsman[®] Secure Network Radio Key Features

- National Security Agency-certified Suite B Cryptographic High Value Product for Secret and Below applications
- Multiple radio frequencies for anti-jamming, high reliability, redundancy and diversity, and load-balancing
- Rajant's InstaMesh[®] networking software, enabling the network to quickly adapt to rapidly deployed and quickly
- or constantly moving network elements
- Dust-tight and water-resistant enclosures that are able to withstand hostile environments with conditions such as temperature extremes, wind, rain, snow, dust, and vibrations
- Scalability to hundreds of mobile high-bandwidth nodes
- Fast and easy deployment, especially important for establishing ad-hoc networks
- Fully redundant, self-healing mesh technology
- BC|Commander application for Windows or Linux for easy configuration and continuous remote monitoring of Huntsman[®] Secure Network Radio and mesh network link quality



RAJANT

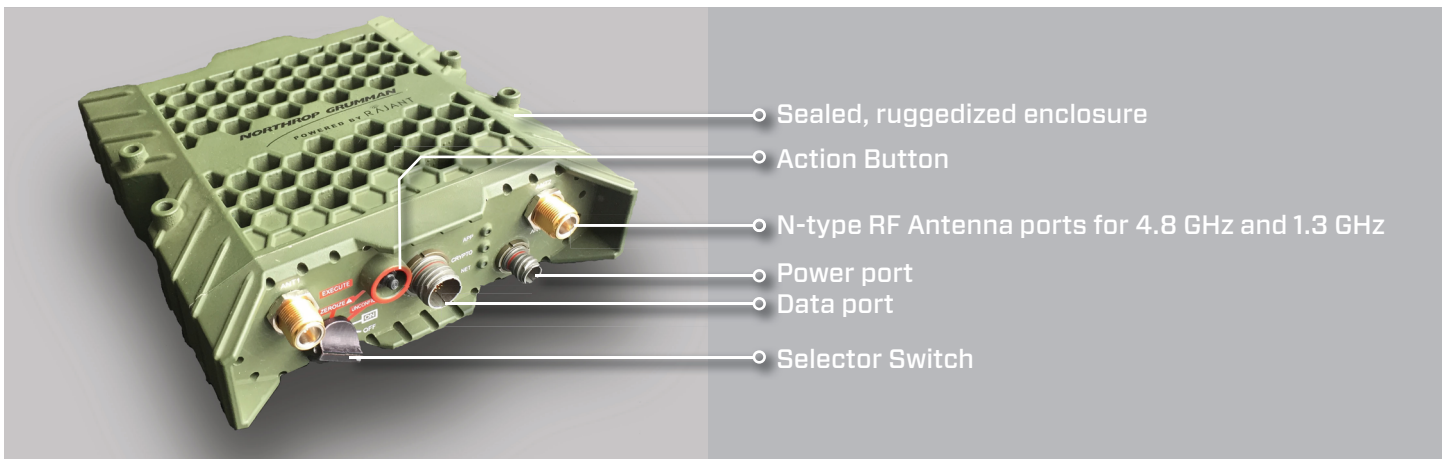

Performance Specifications:

- Throughput: Up to 54 Mbps
- Latency: Less than 1ms per hop
- Range: up to 10+ km omnidirectional (Line of Site [LOS])

Wireless:

- Four transceivers per HSNR.
 - 1x 1.3 GHz (1350 - 1390 MHz)
 - 29 dBm (Max RF TX Power)
 - 3x 4.8 GHz (4800 - 4940 MHz)
 - 28 dBm (Max RF TX Power)

For more information, please contact:

Jenn Galloway
 Secure COMMS Product Manager
 (o) 256.327.6760
 (m) 256.424.2746
 Jennifer.galloway@ngc.com

Ed Preston
 RAM Warn Program Manager
 (o) 256.327.6575
 (m) 256.714.9117
 Ray.preston@ngc.com

Northrop Grumman
 Information Systems
 7575 Colshire Drive
 McLean, VA 22102

www.northropgrumman.com
 © 2015 Northrop Grumman Systems Corporation
 All rights reserved. Approved for Public Release: case # 15-1950
 IS-141 9-21-2015

Interfaces:

- Two 10/100 Mbps Ethernet interfaces.
- Two USB and one RS-422 interfaces for application specific uses (e.g., GPS integration, voice communications).
- One DS-101 key fill interface.
- LEDs for mesh network status, key status, and application specific uses.
- Four N-Type RF ports

Networking:

- VLAN tagging and trunking support.
- VLAN priority and QoS Support.
- Black side DHCP support.

Security:

- NSA-certified Suite B encryption
- Access control lists (black list & white list)
- Node-to-node authentication
- Per hop verification of packets within mesh

Physical:

- Dimensions: 8.43 in x 7.78 in x 2.40 in
- Weight: 8 lbs., 10 oz.

Power:

- Input Power:
 - 18-75VDC
 - AC power supply for 100-240, 50/60Hz VAC operation
 - 40 W max power consumption

Environment:

- Operating/Storage Temperature: -40C to +80C (-40F to +176F)
- Humidity: 95% (non-condensing)
- Designed to meet MIL-STD 810G specifications for environmental conditions
- Sealed, ruggedized enclosure allows for radio deployment in all types of weather - hot/cold, wet/dry, humid, etc.

THE VALUE OF PERFORMANCE.

NORTHROP GRUMMAN