

# Termination | 2W

Termination Load (DC-6 GHz)



## General Information

A termination or load is a dissipative electronic device used at the end of a transmission line or waveguide to convert transmitted energy into heat, so that essentially no energy is radiated outward or reflected back to its source.

These terminations are ideally suited for a variety of applications including testing, accurate measurement, and to terminate an unused port in an in-building system.

### Frequency Range

- DC - 6 GHz

### Product Highlights

- Wide Frequency Band
- 2G/3G/4G/LTE Coverage
- Low VSWR
- Widely used for In-Building Solutions

## Electrical & Mechanical Specifications


Frequency:	DC-6GHz
Impedance:	50 Ohm
Power:	2 W (Average)
Temperature:	-25°C to +65°C -13°F to +149°F
VSWR:	≤1.20
Color:	Black
Dimensions: (Includes Connector)	1.42" L x 0.79" W 36mm L x 20 mm W
Max Weight:	1.5 Oz. 42.5g
Available Connectors Types:	2.2-5 Male



## Ordering Details

CS48-920-001	2W 2.2-5 M Termination
--------------	------------------------

## Mechanical Drawing

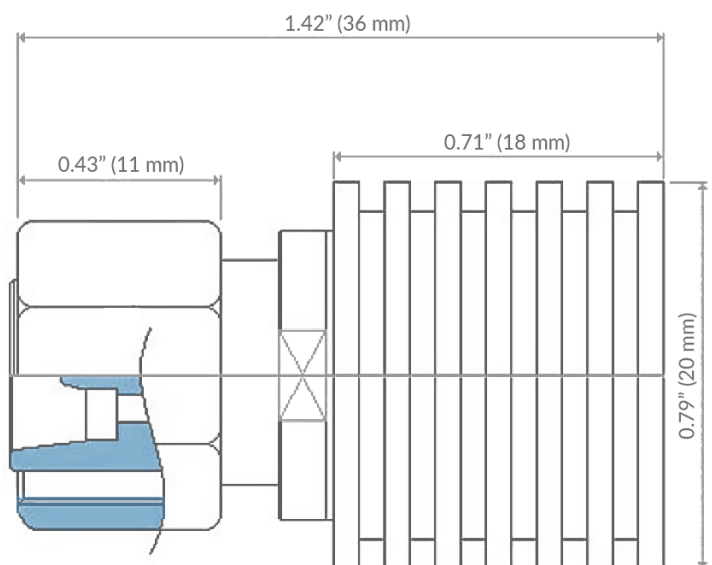

WESTELL.COM